


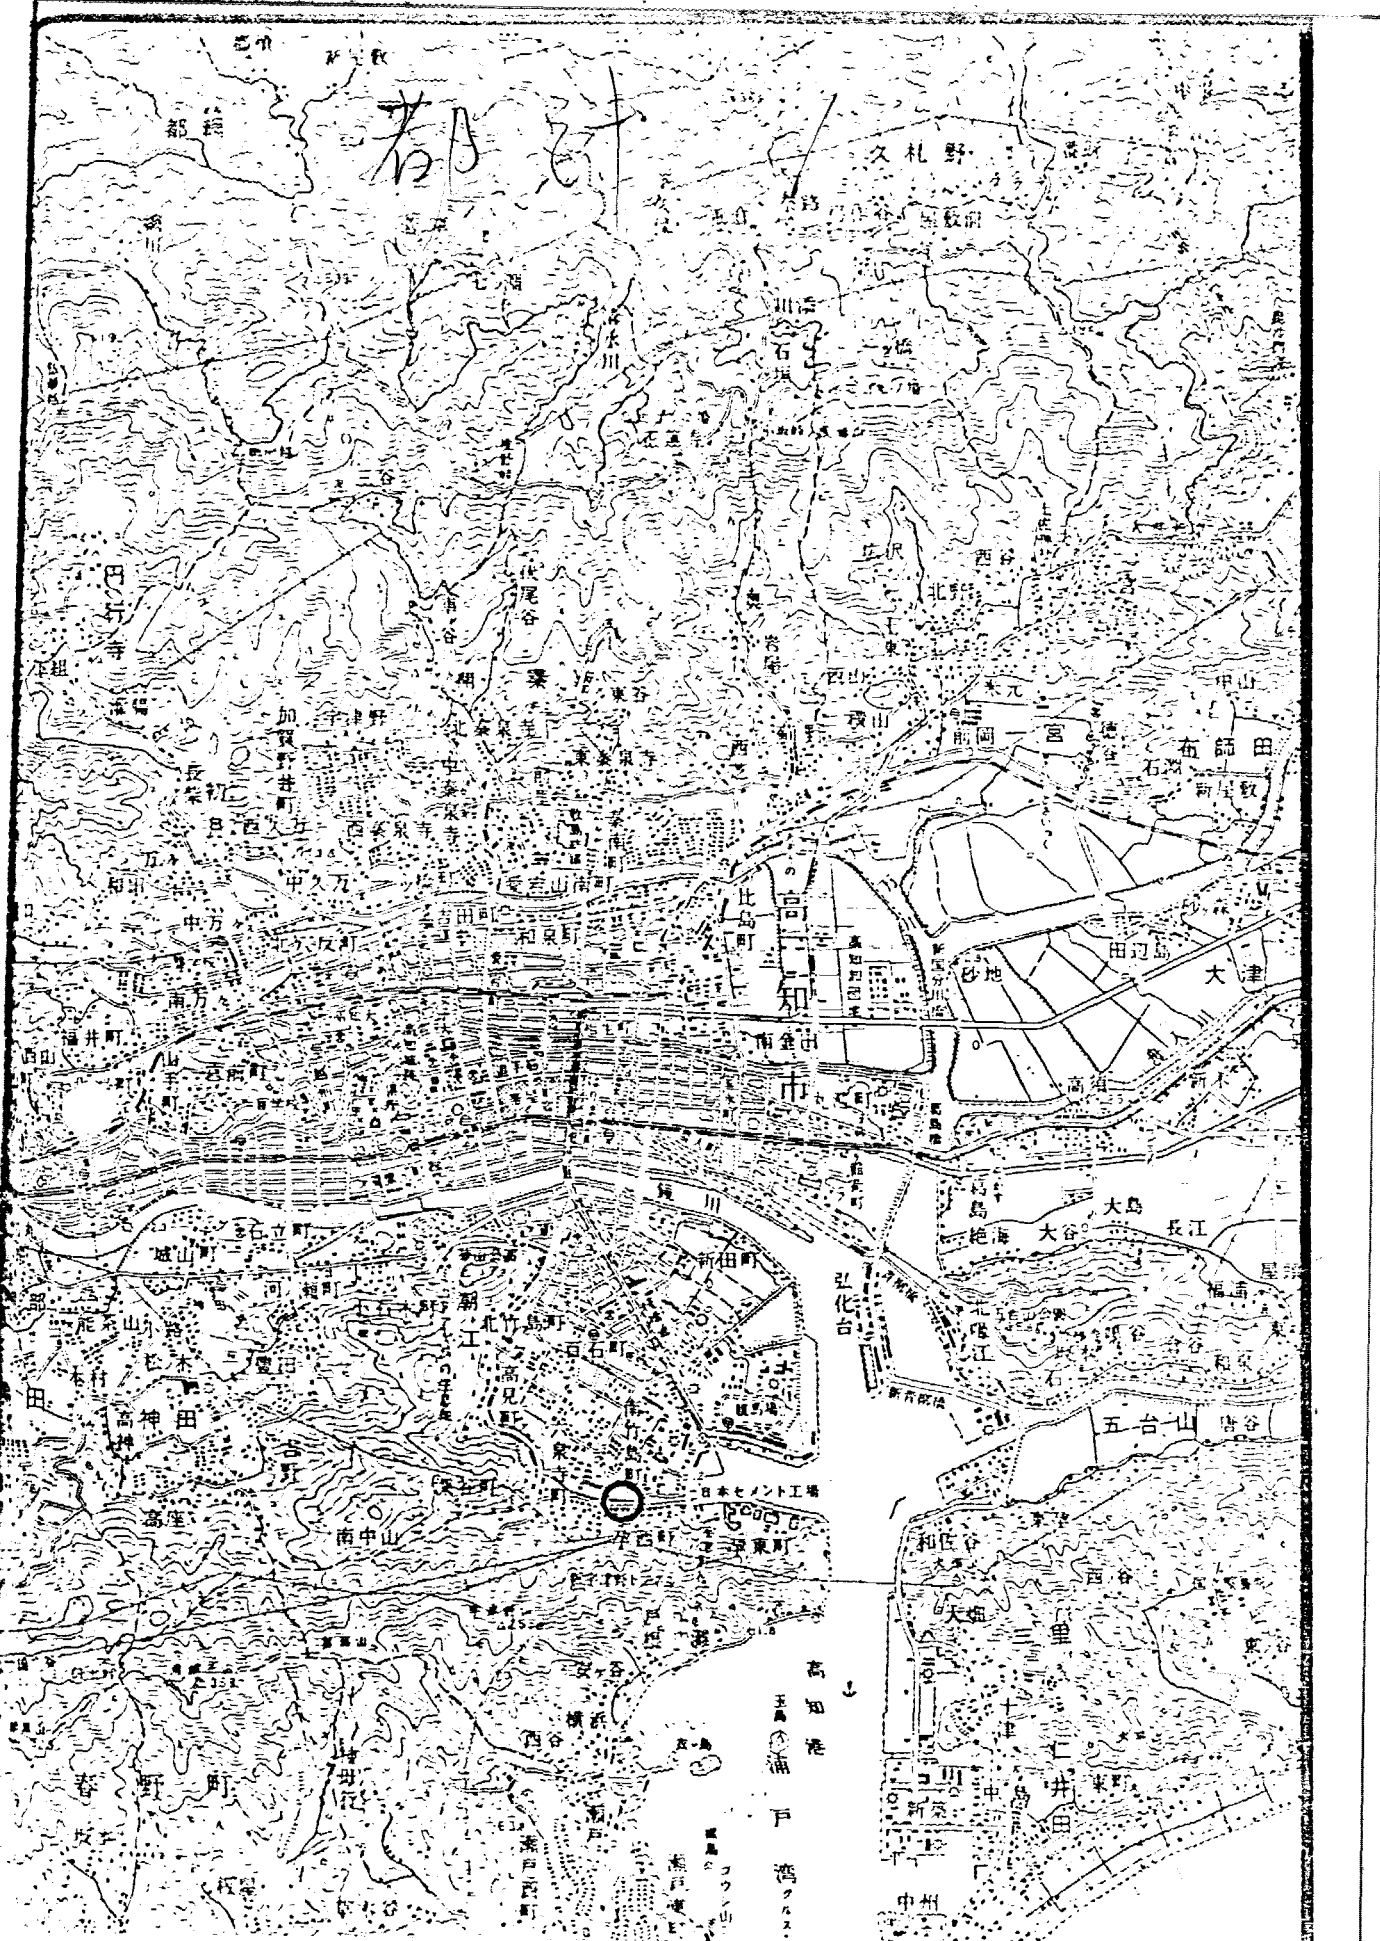

梅江橋線道路改良工事地質調査委託業務 S 1/100.

調査地点 高知市宇

NO 1 ~ 1

標 高

4.802

m

調査年月日

孔内水位

標尺	標高	深度	円厚	柱状図	色調	土質名	観察	相対密度	相対剛度	標準貫入試験										試料		
										深度 m	N 値 回/cm	10cm毎の 打撃回数			N 値					採取 方法	採取 深度(m)	
m	m	m	m									10 cm	20 cm	30 cm	0	10	20	30	40	50		
0	4.802	0.00	0.00	○		(埋 土)																
1	3.302	1.50	1.50	○	淡桃褐	礫混り土砂			非常に 軟弱	1.50	1/30	1	0	0								
2				▽			腐植物混り			2.00	1/30	1	0	0								
3	1.102	3.70	2.20	▽	暗灰	砂・シルト互層			軟弱	3.50	3/30	1	1	1								
4				▽			腐植物混り			4.00	3/30	1	1	1								
5				▽						5.50	3/30	1	1	1								
6				▽						6.00	3/30	1	1	1								
7				▽						7.50	25/30	1	1	0.5								
8				▽						8.00	25/30	1	1	0.5								
9	-3.998	8.80	5.10	▽	暗灰	シルト																
10	-5.198	10.00	1.20	○	青褐	礫混り土砂			非常 硬	9.50	18/30	5	6	7								
11	-6.198	11.00	1.00	▽	暗黒褐	腐植物混り土砂				10.00	18/30	5	6	7								
12				○						11.50	22/30	6	7	9								
13				○						12.00	22/30	6	7	9								
14				○						13.50	14/30	3	5	6								
15				○						14.00	14/30	3	5	6								
16	-10.998	15.80	4.80	○	青	礫混り土砂				15.50	12/30	3	4	5								
17	-11.398	16.20	0.40	▽	黒褐	腐植物				16.00	12/30	3	4	5								
18				○						17.50	12/30	3	4	5								
19				○						18.00	12/30	3	4	5								
20	-14.698	19.50	3.30	○	青	礫混り土砂			硬	19.50	25/30	3	6	16								
21	-15.548	20.35	0.85	▽	青灰	強月化チャート				20.00	25/30	3	6	16								
22	-15.798	20.60	2.25	▽	青灰	チャート																
23	-16.698	21.50	0.90	▽	桃青	強月化チャート				21.50	50/10	50										
24				▽					固結状	22.00	50/10	50										
25				▽						23.50	50/3	50										
26				▽						24.00	50/3	50										

〔注〕 1. 試料採取方法の記号(記号の右の数字は試料番号)

- — 1 乱さない試料
- ◎ — 2 貫入試験機による試料
- — 3 コアー試料

2. 試料採取深度と回収比

3.20 3.20~3.70は試料採取深度(m)
45/50 45/50は回収比(50cm:貫入深さ.45cm試料長さ)
3.70

3. 標準貫入試験の項で10cm毎の打撃回数とは、最初の10cm貫入に要した打撃回数10cm~20cmの間要した打撃回数をそれぞれ示したものである。

調査地点

NO1~2

標高

調査年月日

孔内水位

標尺	標高	深度	層厚	柱状図	色調	土質名	観察	相対密度	相対稠度	標準貫入試験											試料		
										深度 m	N 値 回/cm	10cm毎の 打撃回数			N 値					採取方法	採取深度 (m)		
												10 cm	20 cm	30 cm	0	10	20	30	40			50	
m	m	m	m																				
25	19.898	24.50	3.00	/	赤	弱月化 40-1			固結状	24.50	50/14	35	15/4									○	
26	20.798	25.60	1.10	/	黄	40-1				26.00													
				/					固結状	26.50	52/15	27	25/5									○	
27	21.898	26.70	1.10	/	赤	弱月化 40-1																	
28						本孔完了																	
29																							
30																							

〔注〕 1. 試料採取方法の記号(記号の右の数字は試料番号)

- — 1 乱さない試料
- ◎ — 2 貫入試験機による試料
- — 3 コアー試料

2. 試料採取深度と回収比

3.20 3.20~3.70は試料採取深度(m)
45/50 45/50は回収比(50cm:貫入深さ, 45cm試料長さ)
3.70

3. 標準貫入試験の項で10cm毎の打撃回数とは、最初の10cm貫入に要した打撃回数10cm~20cmの間要した打撃回数をそれぞれ示したものである。

梅、辻、宇橋線道路改良工事地質調査委託業務 5/100

調査地点 高知市

NO2-1

標高 3.672 m

調査年月日 554.11.19 ~ 554.11.29

孔内水位

標尺	標高	深 度	厚 度	柱 状 図	色 調	土 質 名	観 察	相 対 密 度	相 対 稠 度	標 準 貫 入 試 験										試 料		
										深 度 m	N 値 回/cm	10cm毎の 打撃回数			N 値					採取方法	採取深度 (m)	
m	m	m	m							m	回/cm	10 cm	20 cm	30 cm	0	10	20	30	40	50		
0	3.672	0.00	0.00	▽▽▽			0.00~0.80m 腐植物混															
1				▽▽▽																		
2									非常 軟	1.50 2.00	1/30	1	0	0								
3																						
4									軟	3.50 4.00	3/30	1	1	1								
5																						
6										5.50 6.00	3/30	1	1	1								
7																						
8	-4.628	8.30	8.30	▽▽▽	暗灰	シルト				2.50 8.00	2.5/30	1	1	0.5								
9	-5.428	9.10	0.80	▽▽▽	暗灰	砂 質 土	小礫・腐植物混			9.08												
	-5.928	9.60	0.50	▽▽▽	暗黄土	砂 礫			軟	9.58	33/30	11	14	8								
10	-6.328	10.00	0.40	▽▽▽	暗黄土	砂 質 土			中	10.00												
				▽▽▽						10.50	7/30	3	2	2								
11	-7.728	11.40	1.40	▽▽▽	濃黄灰	粘土																
12				▽▽▽						12.00												
				▽▽▽						12.50	14/30	3	6	5								
13				▽▽▽																		
				▽▽▽						14.00												
14				▽▽▽						14.50	15/30	5	5	5								
15				▽▽▽																		
				▽▽▽						16.00												
16				▽▽▽						16.50	37/30	13	12	12								
17				▽▽▽																		
				▽▽▽						18.00												
18				▽▽▽						18.50	34/30	8	11	15								
19				▽▽▽																		
				▽▽▽						20.00												
20	-16.628	20.30	8.90	▽▽▽	暗黄灰	礫・砂混り粘土			非常 硬	20.50	22/30	6	7	9								
	-16.828	20.50	0.20	▽▽▽	濃黄褐	腐 植 土																
21	-17.528	21.20	0.70	▽▽▽	暗黄灰	礫・砂混り粘土																
				▽▽▽						22.00												
22	-18.528	22.20	1.00	▽▽▽	濃黄褐	腐 植 土				22.50	30/30	11	8	11								
				▽▽▽																		
23				▽▽▽																		
				▽▽▽																		
24				▽▽▽	暗黄灰	礫・砂混り粘土																

〔注〕 1. 試料採取方法の記号(記号の右の数字は試料番号)

- — 1 乱さない試料
- ◎ — 2 貫入試験機による試料
- — 3 コア試料

2. 試料採取深度と回収比

3.20 3.20~3.70は試料採取深度(m)
45/50 45/50は回収比(50cm:貫入深さ.45cm試料長さ)
3.70

3. 標準貫入試験の項で10cm毎の打撃回数とは、最初の10cm貫入に必要な打撃回数10cm~20cmの間要した打撃回数をそれぞれ示したものである。

調査地点

NO 2-2

標高

調査年月日

孔内水位

標尺	標高	深度	層厚	柱状図	色調	土質名	観察	相対密度	相対稠度	標準貫入試験					試料							
										深度 m	N 値 回/30cm	10cm毎の 打撃回数			N 値						採取方法	採取深度(m)
m	m	m	m							m	回/30cm	10cm	20cm	30cm	0	10	20	30	40	50		
25				0.0					非常に硬い	24.50	27/30	6	6	10								
26	-22.828	26.50	4.30	0.0	暗青灰	礫・砂混じり粘土			硬い	26.00 26.50	9/30	2	2	5								
27				////																		
28				////					非常に硬い	28.00 28.50	30/30	11	8	11								
29				////																		
30				////					固結状	30.00 30.50	31/30	6	10	15								
31	-27.328	31.00	4.50	////	暗黄褐	石灰混じり粘土																
32				////					非常に硬い	32.00 32.50	26/30	7	9	10								
33				////																		
34				////					固結状	34.00 34.50	40/30	11	13	16								
35				////																		
36				////					非常に硬い	36.00 36.50	25/30	6	8	11								
37				////					"	37.00	29/30	8	11	10								
38	-34.528	38.20	7.20	////	赤褐	石灰化粘土			固結状	37.64 38.14 38.65	55/16	18	37/6									
39				////					"	39.15	50/3	50/3										
40	-36.328	40.00	1.80		乳灰	石灰老																
41						本孔完了																
42																						
43																						
44																						
45																						

〔注〕 1. 試料採取方法の記号(記号の右の数字は試料番号)

- — 1 乱さない試料
- ◎ — 2 貫入試験機による試料
- — 3 コアー試料

2. 試料採取深度と回収比

3.20 3.20~3.70は試料採取深度(m)
45/50
3.70 45/50は回収比(50cm:貫入深さ, 45cm試料長さ)

3. 標準貫入試験の項で10cm毎の打撃回数とは、最初の10cm貫入に要した打撃回数10cm~20cmの間要した打撃回数をそれぞれ示したものである。

梅田至宇橋線道路改良工事地質調査委託業務 5/100

調査地点

NO.3-1

標高

247.1 m

調査年月日

孔内水位

標尺	標高	深度	層厚	柱状図	色調	土質名	観察	相対密度	相対稠度	標準貫入試験										採取方法	採取深度(m)	
										深度 m	N 値 回/cm	10cm毎の 打撃回数			N 値							
m	m	m	m							m	回/cm	10 cm	20 cm	30 cm	0	10	20	30	40	50		
0	3.471	0.00	0.00	▽																		
1	1.921	1.50	1.50	▽	暗灰	シルト				1.50												
2	1.671	1.80	0.30	▽	暗灰	砂				2.00	1/30	1	0	0								
3				▽						3.50												
4				▽						4.00	3/30	1	1	1								
5				▽						5.50												
6				▽						6.00	1/30	1	0	0								
7				▽						7.50												
8	4.229	2.70	5.90	▽	暗灰	シルト				8.00	6/30	1	1	4								
9		9.40		▽	暗黄土					9.50												
10		9.70		▽	暗黄土					10.00	18/30	4	7	7								
11		10.50		▽	黄土																	
12		11.10		▽	淡黄灰					11.50												
13		12.00		▽	暗黄灰					12.00	14/30	5	5	4								
14		12.50		▽	暗黄灰																	
15		12.80		▽	淡黄灰					13.50												
16		14.00		▽	淡黄灰					14.00	18/30	5	7	6								
17				▽						15.50												
18		16.00		▽	淡黄灰					16.00	30/30	5	8	17								
19				▽						17.50												
20		18.00		▽	黄灰					18.00	20/30	5	7	8								
21	15.329	18.80	11.10	▽	淡黄土	礫混り土砂				19.50												
22	16.129	19.60	0.80	▽	淡黄土	粘土				20.00	17/30	6	5	6								
23	16.529	20.00	0.40	▽	淡黄灰	礫混り土砂																
24				▽						21.50												
25				▽						22.00	17/30	5	7	5								
26	18.529	22.00	2.00	▽	暗黄灰	腐植土				23.50												
27				▽						24.00	25/30	6	8	11								
28	19.629	23.10	1.10	▽	暗黄灰	礫混り土砂																
29	20.029	23.50	0.40	▽	暗黄灰	腐植土																
30				▽																		

〔注〕 1. 試料採取方法の記号(記号の右の数字は試料番号)

- — 1 乱さない試料
- ◎ — 2 貫入試験機による試料
- — 3 コア試料

2. 試料採取深度と回収比

3.20 3.20~3.70は試料採取深度(m)
45/50 45/50は回収比(50cm:貫入深さ.45cm試料長さ)
3.70

3. 標準貫入試験の項で10cm毎の打撃回数とは、最初の10cm貫入に要した打撃回数10cm~20cmの間要した打撃回数をそれぞれ示したものである。

調査地点

No. 3~2

標高

調査年月日

孔内水位

標尺	標高	深度	層厚	柱状図	色調	土質名	観察	相対密度	相対稠度	標準貫入試験										試料	
										深度 m	N 値 回/cm	10cm毎の 打撃回数			N 値					採取方法	採取深度 (m)
												10 cm	20 cm	30 cm	0	10	20	30	40	50	
25	-21.029	24.50		0.0		礫混じり土砂															
26	-22.529	26.00	1.50		暗灰	チャート				25.50	50/15	37	13								
27							未風化チャート礫 と互に挟む。			26.75	30/30	8	9	13							
28										27.25											
29										28.50	35/30	11	11	13							
30										29.00											
31										30.50	48/30	11	15	22							
32										31.00											
33										32.50	50/3	50/3									
34										33.00											
35										34.05	50/4	50/4									
36										34.55											
37										35.50	50/5	29	2/5								
38										36.00											
39										36.98	50/2	50/2									
40										37.48											
41										38.65	50/19	35	15/9								
42	-38.129	41.60	15.60		赤褐色	強風化チャート				40.15	38/30	12	13	13							
43	-39.429	42.90	1.30		桃白	石灰混じり粘土				40.80											
44	-40.629	44.10	1.20		乳白	石灰混じり粘土				42.45	50/15	29	2/5								
45	-41.229	44.70	0.60		桃白	石灰混じり粘土				42.75											
46										44.53	50/8	50/8									
47	-44.029	47.50	2.80		乳白	石灰混じり粘土				45.03											
48							本孔完了														

〔注〕 1. 試料採取方法の記号(記号の右の数字は試料番号)

- — 1 乱さない試料
- ◎ — 2 貫入試験機による試料
- — 3 コア試料

2. 試料採取深度と回収比

3.20 3.20~3.70は試料採取深度(m)
 45/50 45/50は回収比(50cm:貫入深さ、45cm試料長さ)
 3.70

3. 標準貫入試験の項で10cm毎の打撃回数とは、最初の10cm貫入に要した打撃回数10cm~20cmの間要した打撃回数をそれぞれ示しにものである。